izofalt yalıtım

Date of revision: June 26 2026
Revision number: 003

BİTÜWAP İZ 2K 2003 GARDEN TECHNICAL SPECIFICATIONS


BITUMEN, POLYMER AND CEMENT-BASED, TWO-COMPONENT LIQUID MEMBRANE

DESCRIPTION FOR IT

Bitumen emulsion, superelastomeric polymer and special cement-based, two-component, high crack bridging capability, elasticity and tensile strength enhanced with various additives, high root resistance, water-based, liquid waterproofing membrane.

AREAS OF USE

It is used in the waterproofing of underground parking lots and green roof terraces, in subsurface waterproofing applications of buildings such as pile foundations, normal foundations, basements and retaining walls, and in the waterproofing of structures and structural elements exposed to temporary and permanent water pressure. It can also be used in the waterproofing of ceramic tiles in wet areas such as terraces, roofs, channels, kitchens, bathrooms, balconies and similar areas. It can be applied together with fiberglass, polyester felt and similar reinforcements.

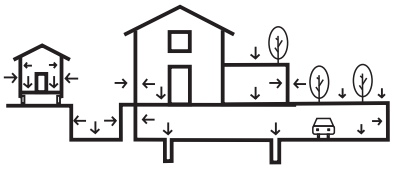

APPLICATION SURFACES

Suitable for application on mineral surfaces such as concrete, stone, brick, block, plaster and screed in interior and exterior spaces

ADVANTAGES

Applicable to all mineral surfaces and has very high adhesion strength. Creates a seamless insulation layer. Very easy and fast application with an insulation pump. Resistance to underground chemicals.

APPLICATION CONDITIONS

Application should not be done in very hot or very humid weather. The ambient temperature for application should be between +5°C and +30°C.

It should not be applied to melting, frozen surfaces or surfaces where there is a risk of freezing within 24 hours. Dusty old mineral surfaces should be repaired before application.

TOOLS USED

Hand mixer, insulation pump, brush, trowel or spatula.

SURFACE PREPARATION

If the surface to be applied is new, it must be free from residues such as cement residue and loose particles, and from oil, dirt, rust,moss and dust that would prevent adhesion; it must be clean, smooth, sound and not exposed to frost. Inner corners should be beveled with WAP TH – 602 repair mortar, and outer corners should be rounded by mechanical means. The surfaces to be applied should be primed with BİTÜWAP İZ 2K 2003 GARDEN liquid component diluted at a ratio of 1/5 (bitüwap İZ 2K 2003 Garden liquid component/water). For perforated, damaged or porous surfaces, a scraping coat should be applied with BİTÜWAP İZ 2K 2003 GARDEN using a spatula or trowel to smooth the surface and prevent air bubble formation. Old or dusty surfaces should be repaired and hardened with our POLYWAP İZK 6000 repair and impregnation product.

APPLICATION

Bitüwap iz 2k 2003 Garden, 8 kg of powder component should be added slowly to 24 kg of liquid component and mixed with a low-speed mixer for at least 3-4 minutes until a homogeneous and lump-free consistency is achieved.It should be applied to the entire surface in 2 coats using a brush or insulation pump. The total application thickness should be determined according to the consumption table,the ratios according to the water pressure it will be exposed to. The second coat should be applied after the first coat has completely dried.In areas exposed to temporary and continuous water pressure, in order to achieve an application thickness of 4 mm, a fiberglass reinforcement mesh with a maximum weight of 100 g/m2 should be glued to the entire surface before the first coat dries, and the second coat should be applied after it dries. The second coat should be applied in such a way as to completely cover the mesh.

CONSUMPTION TABLE

Area of application	Minimum application thickness (dry film)	Minimumconsumption
Temporary pressurized water insulation.	3 mm (with fiberglass reinforcement mesh)	4,5 kg/m²
Waterproofing of continuously pressurized green roofs	4 mm (with fiberglass reinforcement mesh)	6,0 kg/m²

TOOL CLEANING

All tools should be washed with water immediately after application. Dried residues should be cleaned with thinner.

PACKAGING

32 kg. Set (24 kg. Liquid component + 8 kg. Powder component)

STORAGE AND SHELF LIFE

In dry, moisture-free environments away from sunlight, provided the packaging is undamaged and unopened, the product has a shelf life of 12 months from the production date. Packaging must be protected from frost and heat. Two pallets should not be stacked on top of each other during transport and storage.

STANDARD

EN 1504 -2:2004 CE BELGESİ

TEKNİK ÖZELLİKLER

İZ 2K 2003 GARDEN	TECHNICAL INFORMATION
The essence	Bitumen-Polymer-Special Cement
Liquid component	Bitumen-Polymer
Powder component	Modified cement additive powder
Usage period	60 minutes
Colour	Black
Form	Thick liquid
Intensity	Average 1.14 kg/lt.
Softening point	100 degrees
Installation period	Minimum 3 days
Waterproof	Class W2A
Crack bridging capability	Class Cb2
Responding to the fire	Class E
Resistance to compression	ClassC2A
Rain resistance	Class R1

WARNINGS AND RECOMMENDATIONS

Not suitable for metal surfaces. Absolutely no water should be added to the mixture. In applications using an insulation pump, the machine and its equipment must be cleaned immediately after application. Surfaces treated with Bitüwap İZ 2K 2003 Garden must be covered and protected from external conditions within a maximum of 3 days. After the drying period, it should be covered with a suitable material. Soil backfill should not be applied to the treated foundation retaining walls without a protective coating. Application on terraces should be resolved by applying a thermal insulation layer on top of the waterproofing layer.

SAFETY WARNINGS

Always use appropriate safety equipment such as masks, gloves, and goggles. Protect your eyes and face. Avoid contact with eyes and skin.In case of contact with eyes, rinse immediately with plenty of water and consult a specialist. For detailed safety information, read the Material Safety Data Sheet.